


CONTI[®] POLYFLAT

Flat belt for space-saving drive configurations in lift systems

Properties:

- Temperature range from -30 °C to +80 °C
- Can be welded with thermoplastics
- Wear-resistant
- Raw materials and production are silicone free
- Resistant to fuel and benzene
- Oil- and grease-resistant
- Resistant to UV and ozone
- Suitable for tropical climates
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free
- Resistant to hydrolysis

Belt structure:

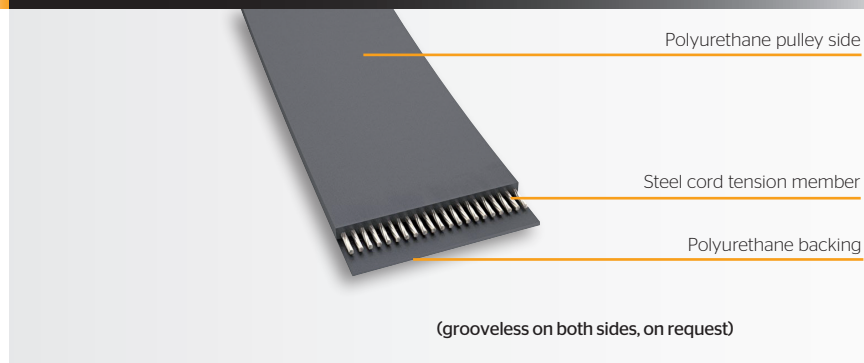

F

Profile	Belt width (mm)
HF	10 - 100
HP	10 - 120
HS	10 - 120
XHP	15 - 120
XHP II	25 - 75
XHS	40 - 150
XHS II	85 - 150

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en