




# CONTI® FUEL CKR 2269

## Fuel hose

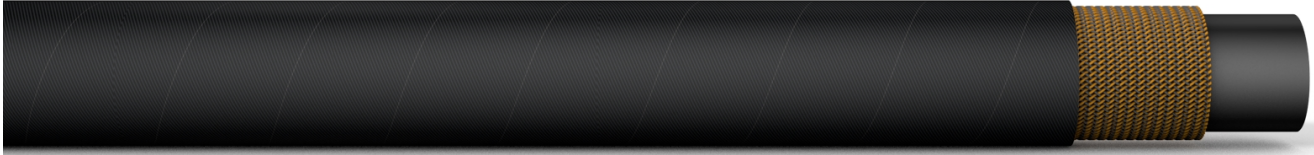

**LABEL:** Dimension- >NBR/CMD/CR< W/J/TC

### FLOW MEDIUM

Biodiesel resistant

### STANDARD / APPROVAL

**DIN**

73379 Typ A1

### DESCRIPTION

**Inner lining:** NBR, black

**Reinforcements:** CMD

**Cover:** CR, black, smooth

**Working pressure up to:** 6 bar / 87 psi

**Temperature range:** from -40 °C / -40 °F up to +90 °C / +194 °F  
up to +110 °C / +230 °F

**Further properties:** Highly flexible

Suitable for biodiesel and methyl ester of rapeseed (RME) upto 70°C

### TECHNICAL DATA

nominal width	inner-Ø	wall thickness	outer-Ø	length	working pressure		min. burst pressure		min. bending radius	weight
zoll/inch	mm	mm	mm	m	bar	psi	bar	psi	aprx. mm	aprx. g/ m
3/16	4.5	3	10.5	80	6	87	30	435	50	92.347
1/4	6	3	12	80	6	87	30	435	55	109.706
5/16	7.5	3	13.5	80	6	87	30	435	70	140.436
5/16	8	3	14	80	6	87	30	435	70	135.707
3/8	9	3	15	80	6	87	30	435	80	159.531
3/8	10	3	16	20	6	87	30	435	80	151.157
1/2	11	3.5	18	20	6	87	30	435	80	207.993
5/8	16	3.5	23	20	6	87	30	435	80	263.01

Pressure and vacuum based on room temperature / High pressure and/or temperature lead to reduced component durability / Other dimensions upon request

#### Industrial Fluid Solutions

ContiTech Schlauch GmbH  
Continentalstr. 3-5 | 34497 Korbach, Germany  
[industrialhoses@fluid.contitech.de](mailto:industrialhoses@fluid.contitech.de)

Version: 2021\_05.18 | 2021-05-31

#### [www.continental-industry.com](http://www.continental-industry.com)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2021 ContiTech AG. All rights reserved. For complete information go to: [www.continental-industry.com/en/special-pages/disclaimer-publications](http://www.continental-industry.com/en/special-pages/disclaimer-publications)