


CONTI[®] SYNCHROLINE

Open-ended timing belt for use in automatic sliding doors

Properties:

- Temperature range from -20 °C to +100 °C, depending on application
- Conditionally resistant to oil
- Ozone-resistant
- Resistant to aging
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free
- Antistatic in accordance with ISO 9563 (CXP)

Belt structure:

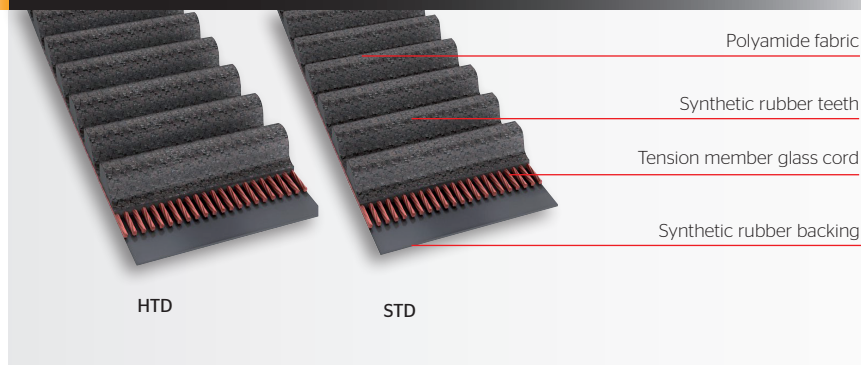

HTD

Profile	Belt width (mm)
HTD 5M	10 - 20
HTD 8M	10 - 20

STD

Profile	Belt width (mm)
STD S8M	10 - 20

CONTI[®] SYNCHROLINE CXP
heavy-duty type on request.