

CONTI[®] SYNCHRODRIVE N10


Self-guiding nubbed belts for transport and linear technology



Properties:

- Temperature range from -30 °C to +80 °C (please request technical advice for range under -10 °C and above +50 °C)
- Can be welded with thermoplastics
- Wear-resistant
- Raw materials and production are silicone free
- Resistant to fuel and benzene
- Oil- and grease-resistant
- Resistant to UV and ozone
- Suitable for tropical climates
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free
- Resistant to hydrolysis

Belt structure:

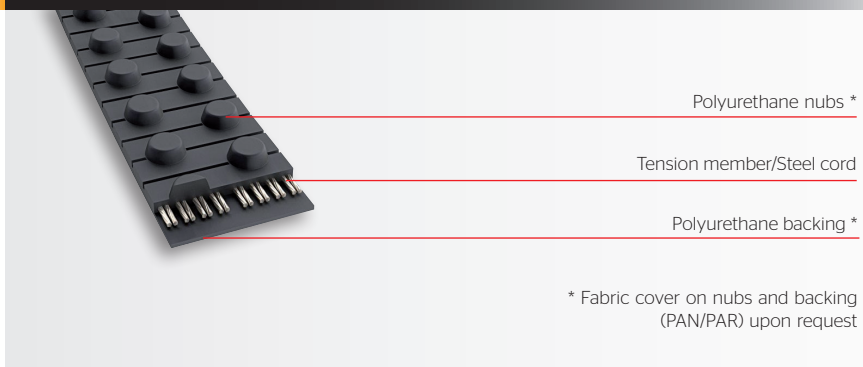

Profile	Belt width (mm)
N10	10 - 100