

CONTI[®]V MULTIRIB POWER


V-ribbed belts with low-stretch tensile member for heavy-duty power transmission accompanied by highest loads



Properties:

- Temperature range from -30 °C to +80 °C
- Enhanced running smoothness
- Suitable for extremely high loads
- Electrically conductive in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

Belt structure:

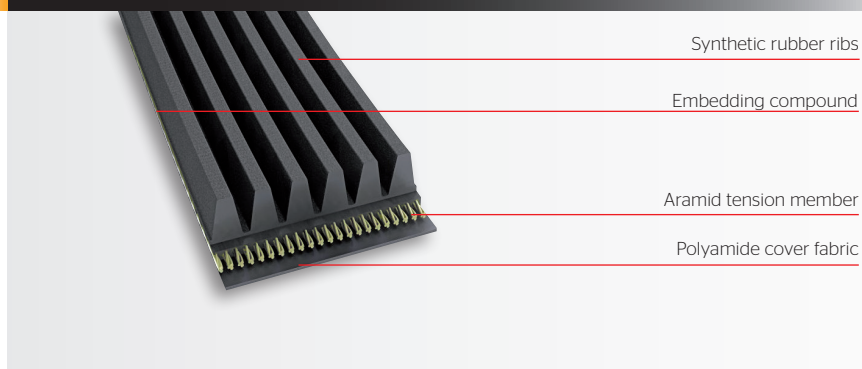

Profile	Length range
	L _b (mm) / L _b (1/10 inch)
PL ZAR	1956 - 6096 / 770 - 2400
PM ZAR	2286 - 13741 / 900 - 5410

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en