


# CONTI®V

Wrapped V-belts for demanding drives in all sectors of machine engineering, classic according to DIN 2215, narrow according to DIN 7753

## Properties:

- Temperature range from -55 °C to +70 °C
- Matched set L=L (from 1000 mm)
- Antistatic in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

## Belt structure:

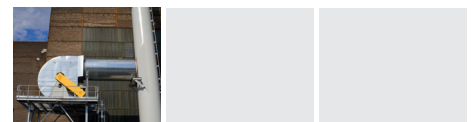


## classic

| Profile | Length range L <sub>1</sub> (mm) |
|---------|----------------------------------|
| 10/Z    | 425 - 2500                       |
| 13/A    | 457 - 6305                       |
| 17/B    | 584 - 9525                       |
| 20/-    | 900 - 8000                       |
| 22/C    | 1041 - 13208                     |
| 25/-    | 1300 - 9000                      |
| 32/D    | 2000 - 13208                     |
| 40/E    | 4000 - 13208                     |

## narrow

| Profile        | Length range L <sub>d</sub> (mm) |
|----------------|----------------------------------|
| SPZ / 3V / 9N  | 512 - 3550                       |
| SPA            | 732 - 5000                       |
| SPB / 5V / 15N | 1250 - 8000                      |
| 19             | 1400 - 4475                      |
| SPC            | 2185 - 16500                     |
| 8V / 25N       | 4318 - 12700                     |

## Comparison of products:

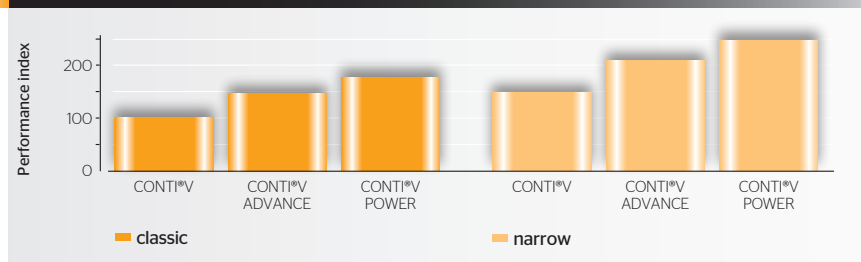

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)