


CONTI®V FO

Raw-edge V-belts for demanding drives, according to DIN 2215 and DIN 7753



Properties:

- Temperature range from -30 °C to +70 °C
- Very good flexibility thanks to molded teeth
- Matched set L=L (from 1000 mm)
- Antistatic in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

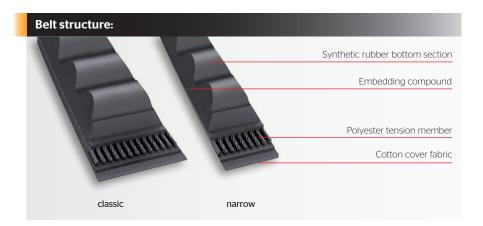





Classic

Profile	Length range L_d (mm)
ZX	505 - 2105
AX	513 - 2697
BX	703 - 3091
СХ	1132 - 3062

Narrow

Profile	Length range L_d (mm)
XPZ	512 - 2800
ХРА	732 - 2932
ХРВ	1250 - 2900
XPC	2000 - 2800

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en

Power Transmission Group ContiTech Antriebssysteme GmbH D-30169 Hannover · Phone +49 511 938 - 71 industrie.as@ptg.contitech.de

ContiTech