


# CONTI<sup>®</sup>V MULTIRIB

V-ribbed belts according to DIN 7867, for high gear ratios, high belt speeds, small pulley diameters and back-tension rollers

## Properties:

- Temperature range from -30 °C to +80 °C
- Enhanced running smoothness
- Suitable for reverse flexing/reverse tensioning idlers
- Electrically conductive in accordance with ISO 1813
- Conditionally resistant to oil
- Suitable for tropical climates
- Dust-proof

## Belt structure:

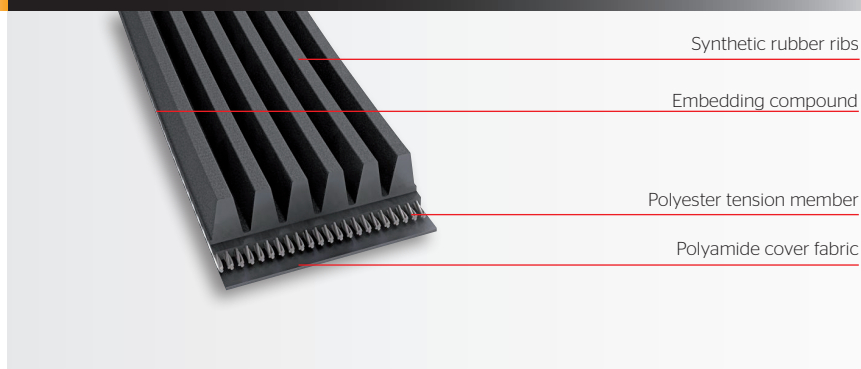

Profile	Length range
	L <sub>b</sub> (mm) / L <sub>b</sub> (1/10 inch)
PJ	356 - 2489 / 140 - 980
PK	635 - 2550 / 250 - 1004
PL	991 - 7055 / 390 - 2777
PM	2134 - 16764 / 840 - 6600

PH Profile on request.