

# CONTI®V MULTIBELT FO


Transversely stiff raw-edge banded V-belts for sustained high power transmission



## Properties:

- Temperature-resistant from -30 °C to +70 °C
- With teeth
- Suitable on small pulleys too
- Higher power transmission
- Particularly smooth-running
- Good flexibility through molded notches
- Antistatic according to ISO 1813
- Limited resistance to oil
- Tropic-proof
- Dust-proof

## Belt structure:

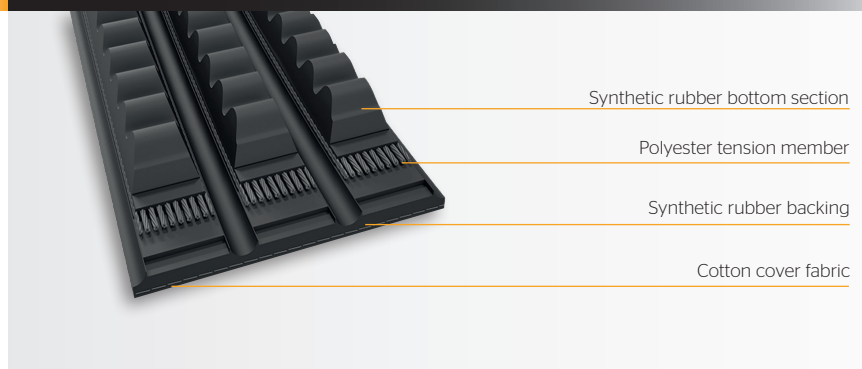


Profile
3VX (9JX)
5VX (15JX)
XPZ
XPA
XPB
XPC

Sizes on request.

**CONTI®V MULTIBELT FO POWER**  
heavy-duty type on request.

## Comparison of products:

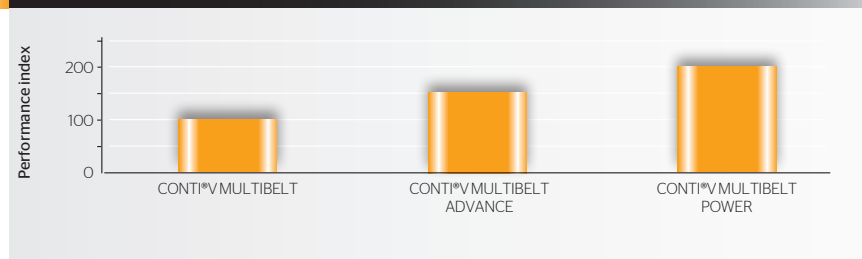

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: [www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)