

# Printec 493 / 495




**Main Application**  
Coating

**Printec 493 / 495 is available in**  
**1,70 - 1,96 mm thickness.**

### Advantages of the product

- › Specifically designed for strippable and varnishing applications
- › Fine buff coating surface for smooth varnish laydown
- › Easy to strip due to the special compressible layer
- › Excellent coating transfer and high resistance to ink pick up
- › Suitable for flood, spot, knock out coating applications

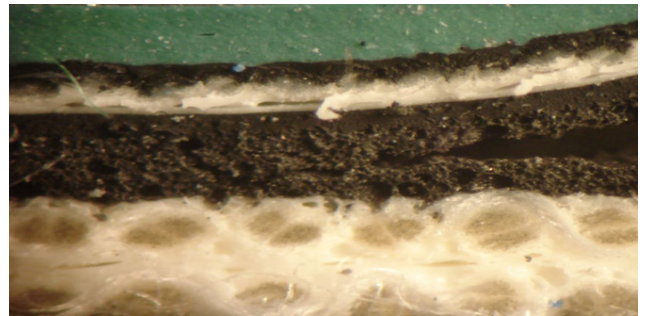

### Technical Data

Type of varnish:	<b>Conventional and some UV</b>
Surface colour:	<b>Blue green</b>
Surface:	<b>Rubber</b>
Thickness:	<b>1,70 - 1,96 mm +/- 0,02 mm</b>
Carrier:	<b>Fabric</b>
Elongation:	<b>&lt;0,9%</b>
Surface roughness:	<b>0,55 µm</b>
Cutting depth:	<b>0,86 - 0,94 mm</b>
Average load value:	<b>250 N/cm<sup>2</sup></b>
Tensile strength:	<b>&gt;59 N/mm</b>

