

**Rollin Hi-Coat**  
Coating

# Rollin Hi-Coat




**Main Application**  
Coating

**Rollin Hi-Coat is available in**  
**1,15 - 1,35 - 1,95 mm thickness**

**Advantages of the product**

- › Rubber coating plate suitable for Aqueous/UV varnishing
- › Excellent dimensional stability thanks to the polyester carrier
- › Easy to strip from polyester base
- › Usable in both directions thanks to its fabricless design

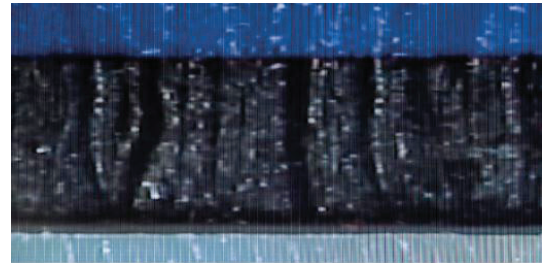

**Guiding Value**

		Standard
<b>Color:</b>	Blue	
<b>Structure:</b>	Fabricless	
<b>Surface Roughness Ra*:</b>	0,6 micron	IO LAB TEC 060 - E (internal)
<b>Compressibility @ 0,23 mm*:</b>	N/A	IO LAB TEC 060 - B (internal)
<b>Thickness +/-0,02 mm*:</b>	1,15 - 1,35 - 1,95 mm	IO LAB TEC 060 - C (internal)
<b>Cutting depth*:</b>	0,8 - 1,0 - 1,6 mm	IO LAB TEC 060 - C (internal)

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.

**Continental Coated Systems Italy S.p.A**  
Strada Provinciale 140,  
26855 Lodi Vecchio, Italy  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disc\\_en](http://www.continental-industry.com/disc_en)