


Mono-Belt montieren – so geht's!

Der breitere Mono-Belt lässt sich mit denselben Arbeitsschritten montieren wie herkömmliche schmalere Einzelbänder. So funktioniert's Schritt für Schritt:




1. Schneiden der Bandenden im gegensätzlichen Winkel und Auftrennen der einzelnen Lagen

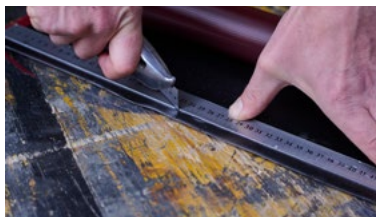

2. Säubern und Schleifen der Oberflächen



3. Auftragen der Vulkanisierlösung und Zwischengummis inkl. Ausrakeln von Luftbläschen und Anwalzen der Überlappungen

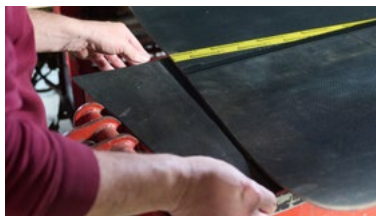

4. Platzieren auf der Vulkanisierpresse inkl. Seitenbegrenzern (um Austritt der Vulkanisierlösung und Verformung zu vermeiden)



5. Vulkanisieren nach definierten Aufheiz- und Abkühlzyklen




6. Finish mit Abschleifen von Vulkanisier-Resten sowie ausstehenden Gewebefasern



How to install a mono belt!

The wider mono belt can be installed using the same steps as conventional narrower single belts. Here's how it works, step by step:

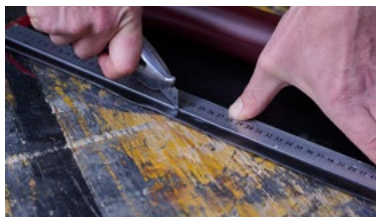


1. Cutting the ends of the belt at opposite angles and separating the individual layers



2. Cleaning and smoothing the surfaces



3. Applying the vulcanizing solution and intermediate rubber layers, including removing air bubbles and smoothing down any overlaps

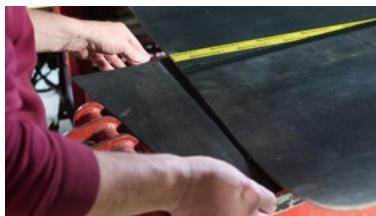

4. Positioning on the vulcanizing press with lateral guides (to prevent any escape of the vulcanizing solution and deformation)



5. Vulcanization according to specific heating and cooling cycles



6. Finish with removal of vulcanization residues and protruding fabric fibers

