

Rollin Polycell Plus

Commercial Sheetfed/Packaging

Rollin Polycell Plus




Main Application

Commercial Sheetfed/Packaging

Advantages of the product

- › Blanket suitable for both conventional and UV inks
- › Special blanket design, very flexible and easy to mount
- › Very high smash resistance
- › Good print quality for several jobs

Rollin Polycell Plus is available in 3ply, 1,96 mm thickness

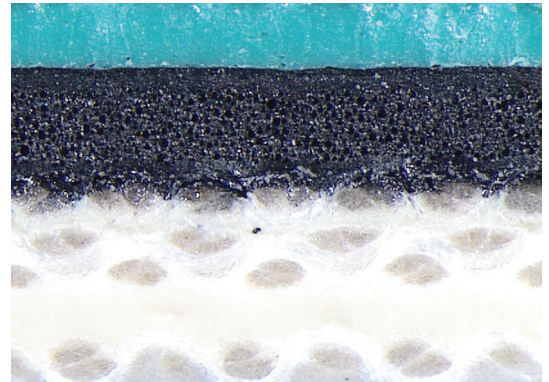

Guiding Value

Standard

Color:	Green	
Structure:	3 ply	
Surface Roughness Ra*:	0,8 micron	IO LAB TEC 060 - E (internal)
Compressibility @ 0,23 mm*:	2,6 MPa	IO LAB TEC 060 - B (internal)
Thickness +/-0,02 mm*:	1,96 mm	IO LAB TEC 060 - C (internal)

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



Continental Coated Systems Italy S.p.A
 Strada Provinciale 140,
 26855 Lodi Vecchio, Italy
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: www.continental-industry.com/disc_en