

Printec 574

Commercial Sheetfed

Printec 574




Main Application
Commercial Sheetfed

**Printec 574 is available in
4ply, 1,98 mm thickness**

Advantages of the product

- › Top surface for conventional inks
- › Very robust and stable carcass
- › Suitable for high volumes printing

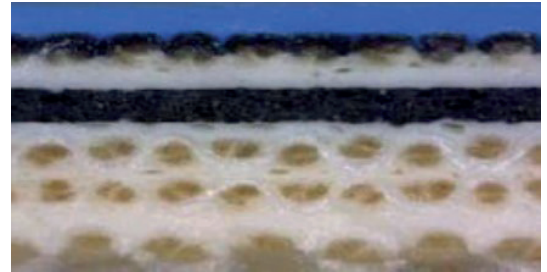

Guiding Value

		Standard
Color:	Blue	
Structure:	4 ply	
Surface Roughness Ra*:	1,0 micron	TCSBR-QMS-FOP0105 / TCSBR-QMS-FOP0005 (internal)
Compressibility @ 0,20 mm*:	1,6 MPa	TCSBR-QMS-FOP0104 (internal)
Thickness +/-0,02 mm*:	1,98 mm	TCSBR-QMS-FOP0033 (internal)

* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.



Continental Indústria e Comercio Brasil Ltda.
Via de acesso João de Goes, No. 1.515,
Barueri, Brazil
www.continental-industry.com/printing-technology

The content of this publication is not legally binding and is provided as information only.
The trademarks displayed in this publication are the property of Continental AG and/or its
affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved.
For complete information go to: www.continental-industry.com/disclosure