

Rollin Hi-Coat



Main Application Coating


Rollin Hi-Coat is available in
1,15 - 1,35 - 1,95 mm thickness.

Advantages of the product

- › Easier set up on the press in both sides (no fabric inside)
- › Very easy to strip
- › Knock-out areas without strings
- › Fast and accurate cad cutting
- › Easy to be handled and reused

Press room advantages

- › Superior laydowns of gloss, satins and soft touch coatings
- › Excellent UV resistance
- › Higher thickness tolerance of pressure adjustments on the press
- › Excellent coating transfer over long runs due to the high quality compressible layer
- › Reduced the numbers of washing operations thanks to mited tendency for ink-back trapping
- › No fabric pattern

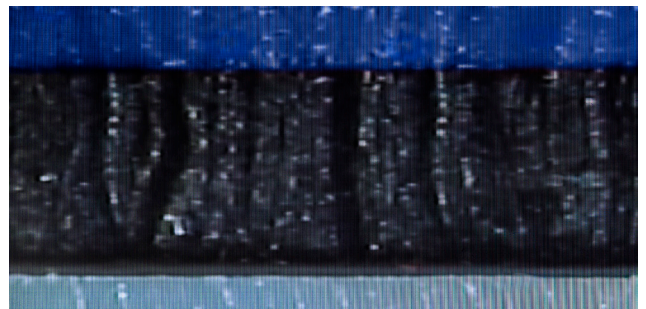

Technical Data

Type of varnish	Aqueous / UV
Surface:	Rubber
Surface colour:	Blue
Surface roughness:	0,6 µm
Thickness:	1,15 - 1,35 - 1,95 mm
Carrier:	Polyester
Carrier thickness:	0,35 mm
Cutting depth:	0,8 - 1,0 - 1,6 mm

