

# Rollin Peak




**Main Application**  
Commercial Sheetfed, Packaging

**Rollin Peak is available in**  
**3 ply, 1,96 mm thickness.**

**Advantages of the product**

- › Very good half tone reproduction and overall printing quality
- › Proper shock mark absorption
- › Excellent paper smash resistance
- › Reliable commercial sheetfed performer

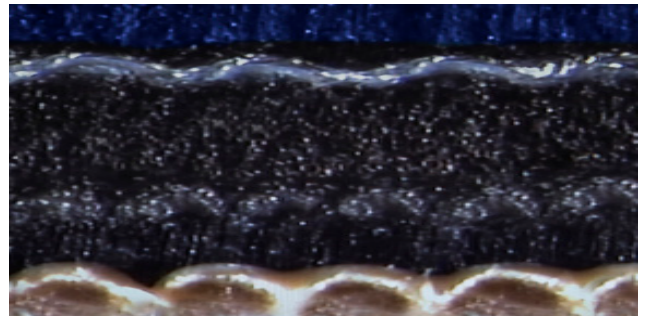

**Technical Data**

Ink compatibility:	<b>Hybrid</b>
Thickness:	<b>1,96 mm</b>
Surface colour:	<b>Blue</b>
Surface roughness:	<b>1,2 µm</b>
Elongation:	<b>&lt;0,9%</b>
Tensile strength:	<b>&gt;60 N/mm</b>
Average load value:	<b>245 N/cm<sup>2</sup></b>
Applications:	<b>Suitable for alternating printing (UV and conventional)</b>

