



Landscaping Hose

that covers more ground.

Cover more ground with Continental.

Whether you're running a one-person show or a fleet, you can't afford to be at the mercy of hoses that don't perform — you have work to do. Continental understands. That's why our landscaping hose portfolio promises exceptional durability, consistently superior performance and the support you need to get every job done well, on time and on budget.

Continental is a world leader in industrial rubber and plastic products and has the largest global footprint of any rubber products manufacturer. Our knowledge and expertise allow us to deliver the most innovative and highest quality products in the market. Plus, our extensive problem solving experience across multiple industries and applications enables us to share innovations over our entire product offering. Which means we can deliver unexpected solutions and advanced improvements in situations where others can't. We push the boundaries of what's possible, and we're constantly solving tomorrow's most challenging problems—today and every day.

Table of Contents

| | |
|--|-----------|
| Mulch | 4 |
| - Mulch Blower | 5 |
| - Spirathane™ PT | 6 |
| Bark | 8 |
| - Bark Blower | 9 |
| Grass | 10 |
| - Spiraflex® Grassvac™ | 11 |
| - Spirathane™ LD | 12 |
| Seeder | 14 |
| - Spiraflex® Air Seeder Hose | 15 |
| Professional Garden Hose | 16 |
| - YardMaster™ Garden Hose | 17 |
| - Pathfinder® Garden Hose | 17 |
| - Heavy Duty + Hot Water Premium Garden Hose | 18 |
| - Heavy Duty + Cold Water Premium Garden Hose | 18 |
| Pressure Washer and Cleaning Hose | 20 |
| - Neptune 1500 | 21 |
| - Neptune 3000 | 22 |
| - Neptune 4500 | 23 |
| - Neptune 6000 | 23 |

Mulch Blower

When it comes to weed control, mulching is a highly effective way to protect the health and beauty of your hard work. For commercial plots, a shovel and rake won't do when you need to mulch large areas in a fraction of the time. Spiraflex® Mulch Blower hose from Continental will help you get the job done faster and easier. Spread mulch evenly every time with high-strength hose that's flexible, durable and capable of performing in a wide range of environments.



Mulch Blower



Application

Spiraflex® Mulch Blower is a heavy-duty mulch-blowing hose that's flexible and durable. It provides visible, unrestricted material applications in a buildup and hose balance. This hose can be used to spray mulch, woodchips and other materials for landscaping applications in a wide range of environments.

Construction

› Tube

Black Spiraflex® Mulch Blower

Constructed with clear, high molecular weight, abrasion-resistant PVC

Yellow Spiraflex® Mulch Blower

Constructed with a clear, high-strength, abrasion-resistant PVC

› Reinforcement

Rigid PVC helix (custom helix colors available if sufficient volume ordered)

Temperature Range

0°F to 158°F (-18°C to 70°C)

Packaging

100' coils covered with stretch film and cardboard

Branding

Not branded

Stock Sizes

4", 5" and 6"

Order Codes

586-479 - Medium Strength Black

586-553 - High Strength Yellow

Spiraflex® Mulch Blower

| SAP # | Style | Length | ID | | Nom. OD | | Max. WP | | Bend Radius | | Vacuum HG | | Weight | |
|----------|--------|--------|----|-------|---------|-------|---------|-------|-------------|-----|-----------|-------|--------|---------|
| | | | ft | in. | mm | in. | mm | psi | mpa | in. | mm | in. | mm | lb./ft. |
| 20477388 | Yellow | 100 | 4 | 101.6 | 4.46 | 113.2 | 35 | 0.172 | 6 | 152 | 29 | 736.6 | 0.991 | 1.475 |
| 20476809 | Yellow | 100 | 5 | 127.0 | 5.61 | 142.4 | 25 | 0.172 | 9 | 229 | 29 | 736.6 | 1.21 | 1.801 |
| 20013644 | Black | 100 | 4 | 101.6 | 4.46 | 113.2 | 15 | 0.103 | 6 | 152 | 29 | 736.6 | 0.984 | 1.464 |
| 20067499 | Black | 50 | 4 | 101.6 | 4.46 | 113.2 | 15 | 0.103 | 6 | 152 | 29 | 736.6 | 0.984 | 1.464 |
| 20024982 | Black | 100 | 5 | 127.0 | 5.61 | 142.4 | 15 | 0.103 | 9 | 229 | 29 | 736.6 | 1.51 | 2.247 |
| 20429573 | Black | 100 | 6 | 152.4 | 6.66 | 169.2 | 15 | 0.103 | 12 | 305 | 29 | 736.6 | 2.124 | 3.161 |

Hose design ratio (burst pressure) 3:1.

Spirathane™ PT



Application

Spirathane™ PT is built to handle a wide range of dry, bulk and abrasive materials. From mulch, powders, plastic pellets and granular materials, Spirathane™ PT does it all. That's because its TPU liner offers superior abrasion resistance versus PVC compounds. It's also reinforced with a rigid Pliovic® helix with a static wire placed between the tube and cover making it ideal for applications where static electrical buildup is common.

Construction

› Tube

Clear, abrasion-resistant polyurethane, ARPM Class B (Medium Oil Resistance)

› Cover

High molecular weight, clear PVC, corrugated for flexibility

› Reinforcement

Clear rigid PVC helix with static wire placed between the tube and cover (custom helix colors available if sufficient volume ordered)

Temperature Range

0°F to 158°F (-18°C to 70°C)

Packaging

100' lengths, coiled and poly-wrapped

Branding

Not branded

Stock Sizes

Contact fitting manufacturer for proper fitting recommendation and coupling procedure

Order Code


586-489

Spirathane™ PT

| SAP # | ID | | Nom. OD | | Max. WP | | Bend Radius | | Vacuum HG | | Weight | |
|----------|-----|-------|---------|-------|---------|------|-------------|-----|-----------|-----|---------|------|
| | in. | mm | in. | mm | psi | MPa | in. | mm | in. | mm | lb./ft. | kg/m |
| 20013682 | 1½ | 38.1 | 1.82 | 46.2 | 45 | 0.31 | 4 | 102 | 29 | 737 | 0.31 | 0.46 |
| 20013684 | 2 | 50.8 | 2.38 | 60.5 | 30 | 0.21 | 6 | 152 | 29 | 737 | 0.52 | 0.77 |
| 20013685 | 2¼ | 57.2 | 2.77 | 70.4 | 35 | 0.24 | 7 | 165 | 29 | 737 | 0.63 | 0.94 |
| 20013686 | 2½ | 63.5 | 3.03 | 77.0 | 30 | 0.21 | 7 | 178 | 29 | 737 | 0.69 | 1.03 |
| 20013687 | 3 | 76.2 | 3.63 | 92.2 | 30 | 0.21 | 8 | 203 | 29 | 737 | 1.15 | 1.71 |
| 20013688 | 4 | 101.6 | 4.76 | 120.9 | 27 | 0.19 | 14 | 356 | 29 | 737 | 1.63 | 2.43 |
| 20046048 | 5 | 127.0 | 5.83 | 148.1 | 27 | 0.19 | 20 | 508 | 29 | 737 | 2.13 | 3.17 |

Hose design ratio (burst pressure) 3:1.



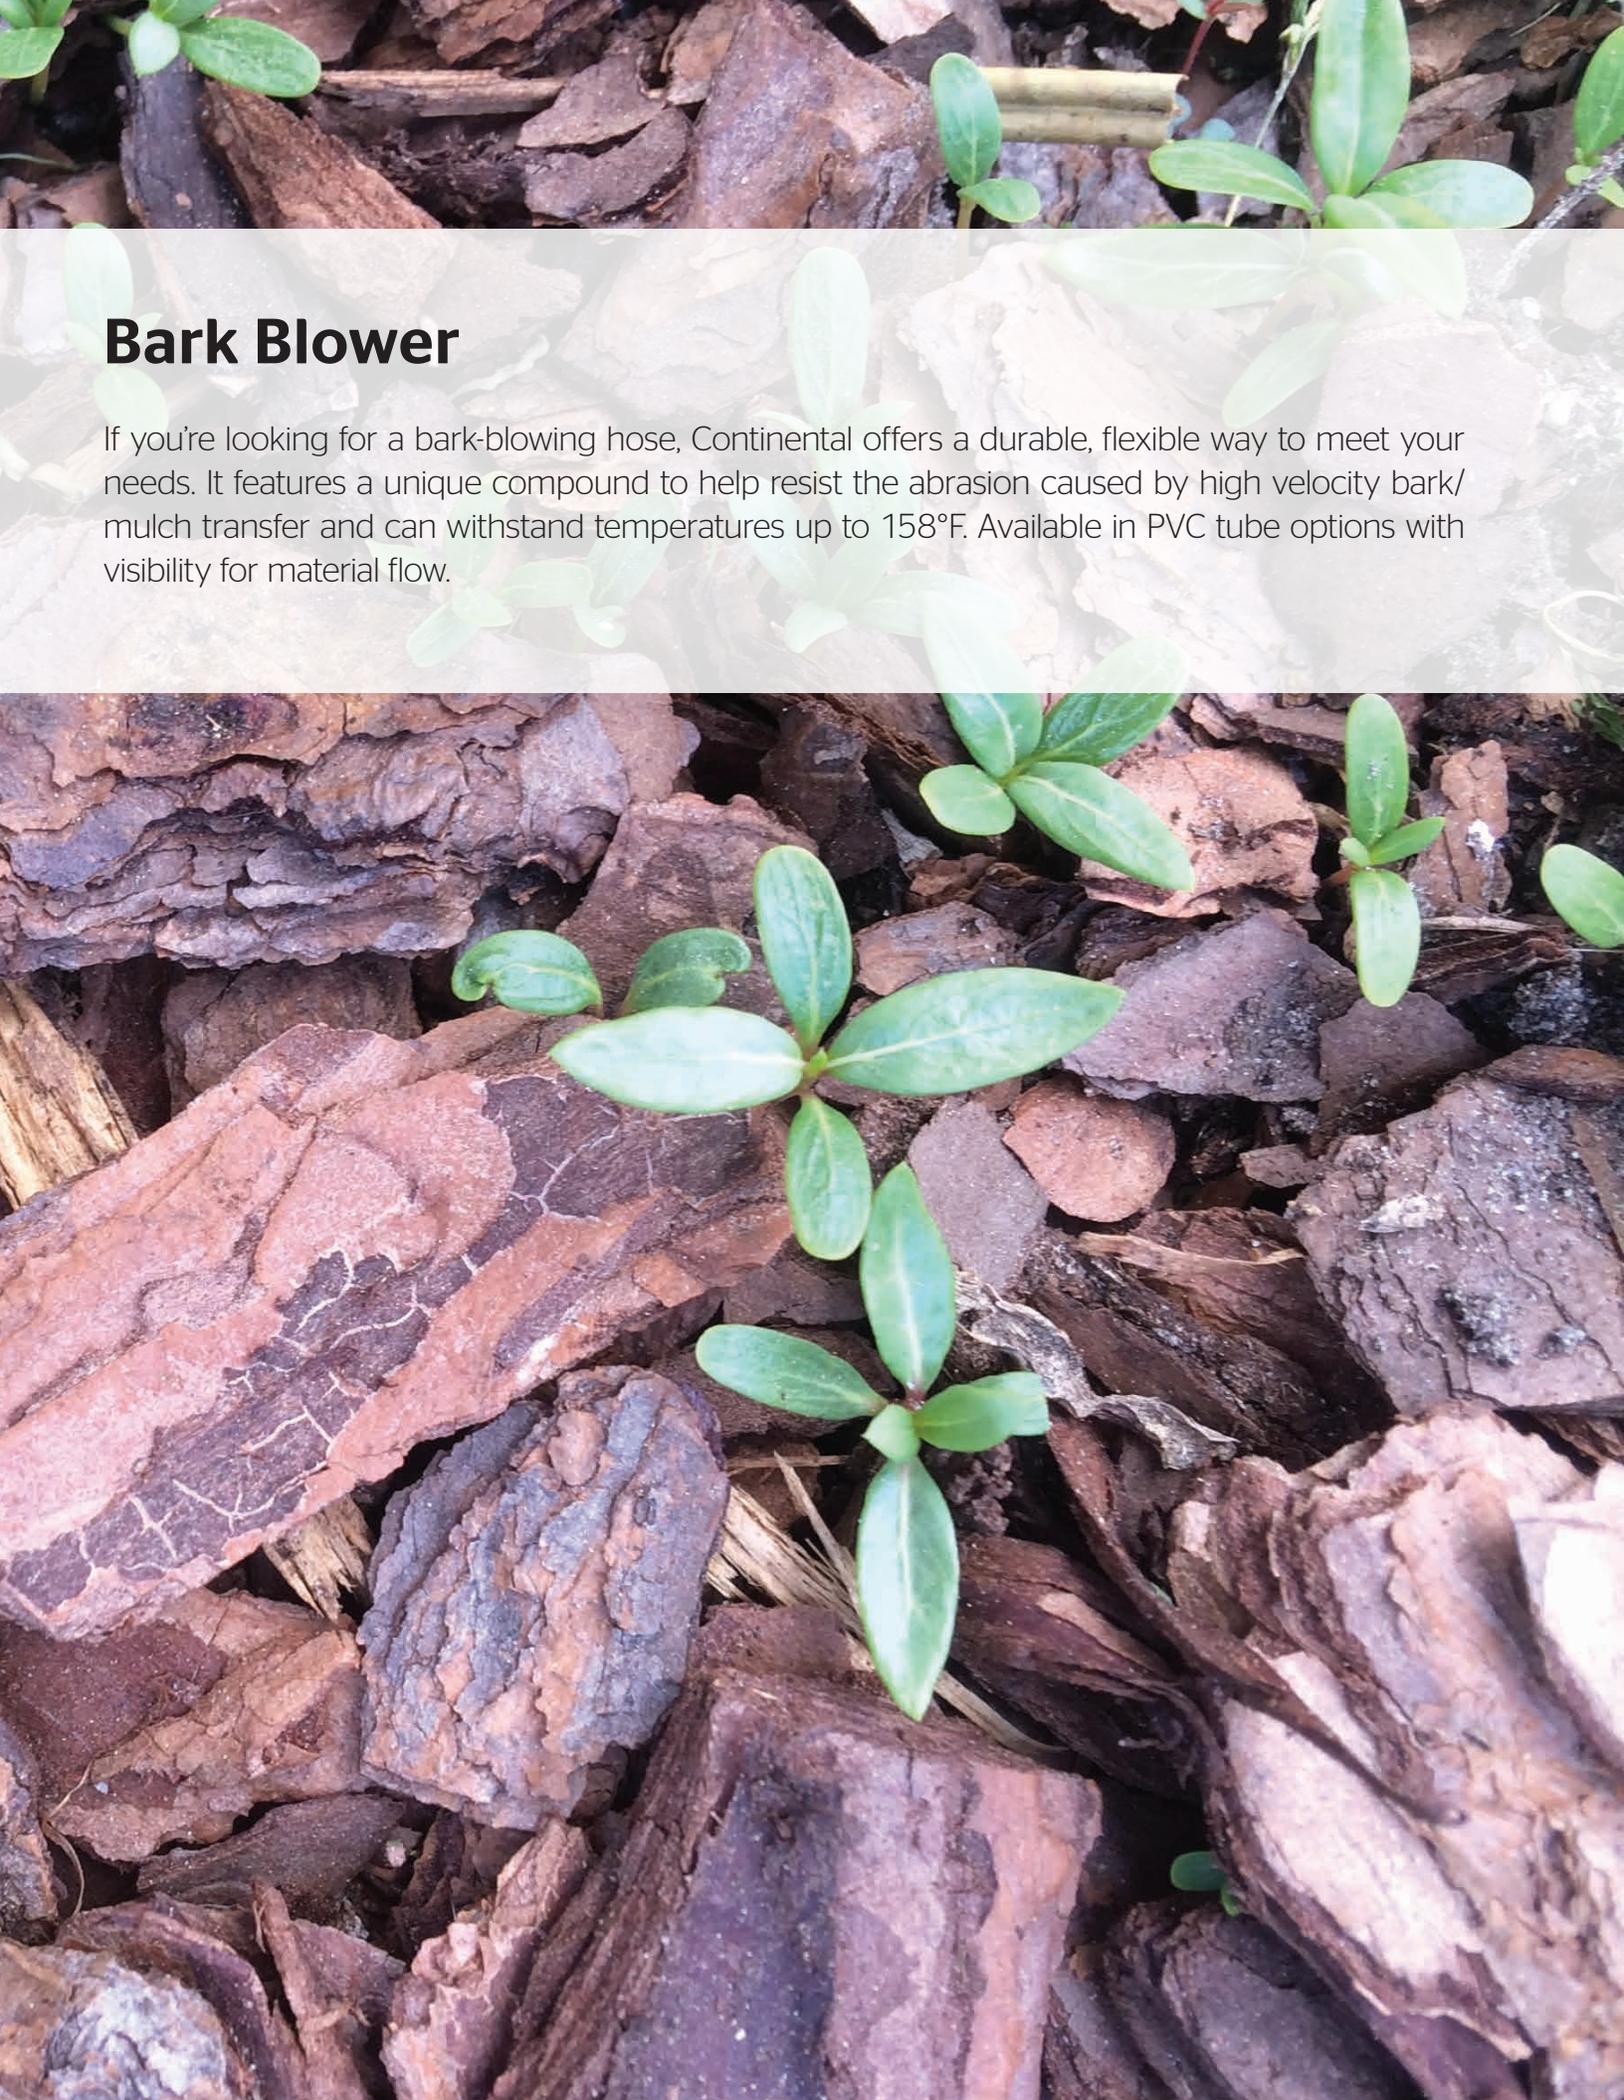

Bark Blower

If you're looking for a bark-blowing hose, Continental offers a durable, flexible way to meet your needs. It features a unique compound to help resist the abrasion caused by high velocity bark/mulch transfer and can withstand temperatures up to 158°F. Available in PVC tube options with visibility for material flow.

Bark Blower



Application

A high-strength, bark-blowing hose that is flexible and durable. It provides visibility through the clear PVC tube allowing users to see material flow.

Construction

› Tube

Constructed with a clear, high-strength and abrasion-resistant PVC compound

› Reinforcement

Gray rigid PVC helix (custom helix colors available if sufficient volume ordered)

Temperature Range

0°F to 158°F (-18°C to 70°C)

Packaging

Coils covered with stretch film and cardboard

Branding

Not branded

Order Codes

586-447

Bark Blower

| SAP # | Style | Length | | ID | | Nom. OD | | Max. WP | | Bend Radius | | Vacuum HG | | Weight | |
|----------|------------|--------|-----|-------|------|---------|-----|---------|-----|-------------|-----|-----------|---------|--------|--|
| | | ft. | in. | mm | in. | mm | psi | mpa | in. | mm | in. | mm | lb./ft. | kg/m | |
| 20013641 | Clear/Gray | 100 | 4 | 101.6 | 4.52 | 114.8 | 35 | .24 | 6 | 152 | 29 | 737 | 1.4 | 2.06 | |
| 20176129 | Clear/Gray | 100 | 5 | 127.4 | 5.65 | 143.4 | 25 | .17 | 9 | 229 | 29 | 737 | 1.7 | 2.53 | |

Hose design ratio (burst pressure) 3:1.



Grass Vacuum

Your work is your signature. Every detail counts – including cleanup. Even if you've created a masterpiece, leaving a mess behind puts your reputation on the line. Spiraflex® Grassvac™ hose from Continental is tough enough for lawn, leaf, mulch and yard waste collection. It's even suitable for dust control, ventilation and ducting.



Spiraflex® Grassvac™



Application

For lawn, leaf, mulch and yard waste collection. It is also suitable for dust control, ventilation and ducting.

Construction

› Tube

Constructed with clear, high-molecular-weight, abrasion resistant PVC

› Reinforcement

Black rigid PVC helix

Packaging

Coils covered with stretch film and cardboard

Branding

Not branded

Order Codes

586-429

Temperature Range

0°F to 158°F (-18°C to 70°C)

Grassvac™

| Part # | Style | Length | | ID | | Nom. OD | | Max. WP | | Bend Radius | | Vacuum HG | | Weight | |
|----------|-------------|--------|-----|-------|-------|---------|-----|---------|-----|-------------|-----|-----------|---------|--------|--|
| | | ft. | in. | mm | in. | mm | psi | mpa | in. | mm | in. | mm | lb./ft. | kg/m | |
| 20013382 | Clear/Black | 100 | 3 | 76.2 | 3.40 | 86.4 | 15 | 0.10 | 3 | 76.2 | 15 | 381 | .56 | .83 | |
| 20013384 | Clear/Black | 100 | 4 | 101.6 | 4.46 | 113.3 | 15 | 0.10 | 4 | 102 | 15 | 381 | 0.71 | 1.06 | |
| 20013385 | Clear/Black | 100 | 5 | 127.0 | 5.49 | 139.4 | 15 | 0.10 | 7 | 178 | 15 | 381 | 1.07 | 1.59 | |
| 20013387 | Clear/Black | 50 | 6 | 152.4 | 6.56 | 166.6 | 10 | 0.07 | 7 | 178 | 15 | 381 | 1.42 | 2.11 | |
| 20013388 | Clear/Black | 100 | 6 | 152.4 | 6.56 | 166.6 | 10 | 0.07 | 7 | 178 | 15 | 381 | 1.42 | 2.11 | |
| 20131290 | Clear/Black | 100 | 7 | 177.8 | 7.63 | 193.8 | 10 | 0.07 | 9 | 229 | 15 | 381 | 1.75 | 2.2 | |
| 20763450 | Clear/Black | 20 | 8 | 203.2 | 8.66 | 220.0 | 10 | 0.07 | 9 | 229 | 15 | 381 | 2.06 | 3.11 | |
| 20013390 | Clear/Black | 50 | 8 | 203.2 | 8.64 | 219.0 | 10 | 0.07 | 9 | 229 | 15 | 381 | 2.06 | 3.18 | |
| 20070260 | Clear/Black | 25 | 10 | 254.0 | 10.58 | 268.8 | 10 | 0.07 | 12 | 305 | 15 | 381 | 2.14 | 2.08 | |
| 20763451 | Clear/Black | 20 | 10 | 254.0 | 10.58 | 268.8 | 10 | 0.07 | 12 | 305 | 15 | 381 | 2.14 | 3.18 | |

Hose design ratio (burst pressure) 3:1.

Spirathane™ LD



Application

Spirathane™ LD stands up to abrasive materials and lasts longer than the standard grass vac hose thanks to its durable TPU liner. This premium hose is ideal for dry pneumatic conveying of solid fines in low-pressure blowing applications.

Construction

› Tube

Clear Polyurethane, ARPM Class B (Medium Oil Resistance)

› Reinforcement

White rigid PVC helix (custom helix colors available if sufficient volume ordered)

Temperature Range

0°F to 158°F (-18°C to 70°C)

Packaging

1½"-6" - 100' lengths, coiled and poly-wrapped
8"-10" - 20' lengths, poly-wrapped with corrugated protection

Branding

Not branded

Couplings

Contact fitting manufacturer for proper fitting recommendation and coupling procedure

Order Code

586-406

Spirathane™ LD

| SAP # | ID | | Nom. OD | | Max. WP | | Bend Radius | | Vacuum HG | | Weight | |
|----------|-----|-------|---------|-------|---------|------|-------------|-----|-----------|-----|---------|------|
| | in. | mm | in. | mm | psi | MPa | in. | mm | in. | mm | lb./ft. | kg/m |
| 20013121 | 1½ | 38.1 | 1.84 | 46.7 | 30 | 0.21 | 2 | 51 | 22 | 559 | 0.25 | 0.37 |
| 20013123 | 2 | 50.8 | 2.35 | 59.7 | 25 | 0.17 | 3 | 71 | 21 | 533 | 0.34 | 0.51 |
| 20013124 | 2½ | 63.5 | 2.89 | 73.4 | 20 | 0.14 | 4 | 89 | 19 | 483 | 0.44 | 0.65 |
| 20013125 | 3 | 76.2 | 3.45 | 87.6 | 20 | 0.14 | 4 | 102 | 18 | 457 | 0.60 | 0.89 |
| 20013127 | 4 | 101.6 | 4.53 | 115.1 | 15 | 0.10 | 7 | 178 | 13 | 330 | 0.88 | 1.31 |
| 20013128 | 5 | 127.0 | 5.56 | 141.2 | 10 | 0.07 | 8 | 203 | 10 | 254 | 1.09 | 1.62 |
| 20013130 | 6 | 152.4 | 6.57 | 166.9 | 10 | 0.07 | 12 | 305 | 7 | 178 | 1.53 | 2.28 |
| 20013131 | 8 | 203.2 | 8.59 | 218.2 | 6 | 0.04 | 23 | 584 | 5 | 127 | 1.73 | 2.57 |

Hose design ratio (burst pressure) 3:1.



Seeder

You need a seeder hose that moves at your speed because delays cost you time, money and possibly your reputation. Continental's Spiraflex® Air Seeder hose conveys dry seeds and other materials quickly. And thanks to its clear cover, you can locate and get jams cleared so you can quickly move on to your next project.



Spiraflex® Air Seeder Hose



Application

For dry conveying of seeds and other materials where abrasion is present and service conditions are moderate. Excellent for low-pressure blowing applications.

Construction

› Tube

Clear, abrasion-resistant Polyurethane, ARPM Class B (Medium Oil Resistance)

› Reinforcement

White rigid PVC helix (custom helix colors available if sufficient volume ordered)

Temperature Range

0°F to 158°F (-18°C to 70°C)

Packaging

Coil-wrapped with cardboard and stretch film

Branding

Date code only

Couplings

Contact fitting manufacturer for proper fitting recommendation and coupling procedure

Order Codes

586-450

Spiraflex® Air Seeder

| SAP # | ID | | Nom. OD | | Max. WP | | Bend Radius | | Vacuum HG | | Weight | |
|----------|-----|-------|---------|-------|---------|-------|-------------|-----|-----------|-----|---------|------|
| | in. | mm | in. | mm | psi | MPa | in. | mm | in. | mm | lb./ft. | kg/m |
| 20013448 | 1 | 25.4 | 1.26 | 32 | 60 | 0.414 | 3 | 76 | 29 | 737 | 0.18 | 0.27 |
| 20013449 | 1¼ | 31.8 | 1.57 | 40 | 50 | 0.345 | 4 | 102 | 29 | 737 | 0.23 | 0.34 |
| 20013450 | 1½ | 38.1 | 1.82 | 46.2 | 50 | 0.345 | 4 | 102 | 29 | 737 | 0.32 | 0.48 |
| 20013451 | 2 | 50.8 | 2.38 | 60.4 | 40 | 0.276 | 5 | 127 | 29 | 737 | 0.42 | 0.63 |
| 20013452 | 2½ | 63.5 | 2.87 | 73 | 40 | 0.276 | 7 | 178 | 29 | 737 | 0.61 | 0.91 |
| 20013453 | 3 | 76.2 | 3.46 | 88 | 35 | 0.241 | 8 | 203 | 29 | 737 | 0.91 | 1.35 |
| 20013454 | 4 | 101.6 | 4.71 | 119.6 | 35 | 0.241 | 11 | 279 | 29 | 737 | 1.61 | 1.40 |
| 20013455 | 5 | 127 | 5.91 | 150 | 30 | 0.207 | 16 | 406 | 29 | 737 | 2.3 | 3.42 |

Hose design ratio (burst pressure) 3:1.



Professional Water (Garden Hose)

Nurture your landscaping with the help of Continental's range of efficient, reliable water hoses. You'll find products for a wide range of applications that can withstand temperatures of -40°F up to 190°F. Our hose lining is resistant to pressure, changes in temperatures, hot water and chemicals, with covers resistant to ozone and UV radiation.

YardMaster™ Garden Hose



Application

Experience the next generation of garden hose

- › Thermoplastic elastomer hybrid materials make it 20% lighter than rubber garden hoses
- › Improved flexibility at low temperatures
- › Heavy-duty crush-proof brass fittings (M x F)

Temperature Range

-40°F to 158°F (-40°C to 70°C)

Construction

› Tube

Green flexible PVC, ARPM Class B (Medium Oil Resistance)

› Cover

Matte green flexible PVC, ARPM Class B (Medium Oil Resistance)

› Reinforcement

Spiral synthetic reinforcement or polyester fiber

| Part # | Length | | ID | | OD | | Max. WP | Packaging | Material # |
|----------|--------|-----|------|------|------|-----|-------------------|-----------|------------|
| | ft. | in. | mm | in. | mm | psi | | | |
| 20530139 | 25 | 1/2 | 12.7 | 0.78 | 19.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20530170 | 50 | 1/2 | 12.7 | 0.78 | 19.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20530171 | 75 | 1/2 | 12.7 | 0.78 | 19.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20530172 | 100 | 1/2 | 12.7 | 0.78 | 19.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20530173 | 25 | 5/8 | 12.7 | 0.90 | 22.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20583057 | 50 | 5/8 | 12.7 | 0.90 | 22.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20530174 | 75 | 5/8 | 12.7 | 0.90 | 22.8 | 100 | MF Brass 5/8" GHT | 540-453 | |
| 20530175 | 100 | 5/8 | 12.7 | 0.90 | 22.8 | 100 | MF Brass 5/8" GHT | 540-453 | |

Hose design ratio (burst pressure) 3:1.

Heavy Duty + Hot Water Premium Garden Hose



Application

This is a commercial premium rubber hose that handles hot water up to 190°F. It is reinforced for high burst strength and is abrasion- and weather-resistant with flexibility in cold temperatures. This hose has heavy-duty crush-proof brass fittings (M x F).

Temperature Range

-40°F to 190°F (-40°C to 88°C)

Construction

› Tube

EPDM rubber

› Cover

Red EPDM rubber

› Reinforcement

Spiral synthetic reinforcement

| Part # | Hose Color | Length | | Hose ID | Max. WP | Packaging | Material # |
|----------|------------|--------|------|---------|-------------------|-----------|------------|
| | | ft. | in. | | | | |
| 20742768 | Red | 25 | 5/8" | 125 | MF Brass 5/8" GHT | 569-028 | |
| 20742345 | Red | 30 | 5/8" | 125 | MF Brass 5/8" GHT | 569-028 | |
| 20582672 | Red | 50 | 5/8" | 125 | MF Brass 5/8" GHT | 569-028 | |
| 20580274 | Red | 75 | 5/8" | 125 | MF Brass 5/8" GHT | 569-028 | |
| 20580275 | Red | 100 | 5/8" | 125 | MF Brass 5/8" GHT | 569-028 | |

Hose design ratio (burst pressure) 3:1.

Heavy Duty + Cold Water Premium Garden Hose



Application

This is a commercial premium rubber hose. It is reinforced for high burst strength and is abrasion- and weather-resistant with flexibility in cold temperatures. This hose has heavy-duty crush-proof brass fittings (M x F).

Construction

- › **Tube**
EPDM rubber
- › **Cover**
Black, green or orange EPDM
- › **Reinforcement**
Spiral synthetic reinforcement

Temperature Range

-40°F to 170°F (-40°C to 77°C)

| Part # | Hose Color | Length | Hose ID | Max. WP | Packaging | Material # |
|----------|------------|--------|---------|---------|-------------------|------------|
| | | ft. | in. | psi | | |
| 20742765 | Black | 25 | 5/8 | 125 | MF Brass 5/8" GHT | 569-029 |
| 20742344 | Black | 30 | 5/8 | 125 | MF Brass 5/8" GHT | 569-029 |
| 20582671 | Black | 50 | 5/8 | 125 | MF Brass 5/8" GHT | 569-029 |
| 20903168 | Black | 75 | 5/8 | 125 | MF Brass 5/8" GHT | 569-029 |
| 20355318 | Black | 100 | 5/8 | 125 | MF Brass 5/8" GHT | 569-029 |

Hose design ratio (burst pressure) 3:1.



| Part # | Hose Color | Length | Hose ID | Max. WP | Packaging | Material # |
|----------|------------|--------|---------|---------|-------------------|------------|
| | | ft. | in. | psi | | |
| 21054064 | Green | 50 | 5/8 | 125 | MF Brass 5/8" GHT | 569-031 |

Hose design ratio (burst pressure) 3:1.



| Part # | Hose Color | Length | Hose ID | Max. WP | Packaging | Material # |
|----------|------------|--------|---------|---------|-------------------|------------|
| | | ft. | in. | psi | | |
| 21054063 | Orange | 50 | 5/8 | 125 | MF Brass 5/8" GHT | 569-030 |

Hose design ratio (burst pressure) 3:1.



Pressure Washer and Cleaning Hose

Jobs get messy. That's when you need Continental's pressure washer and cleaning hose. Our hoses can withstand pressures up to 6000 psi as well as a wide range of temperatures (between -20°F to 325°F). No matter what you have to clean up, Continental has a hose that will become your cleanup chore champion.



Neptune 1500

1500 psi WP



Application

For pressure washer equipment, agricultural sprayers and high-pressure air lines.

Construction

› Tube

Nitrile synthetic rubber

› Cover

Blue, Gray or Yellow oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

› Reinforcement

One braided synthetic yarn up through 1/2"
Two braided synthetic yarn for 3/4"

Temperature Range

-20°F to 210°F (-29°C to 99°C)

Neptune 1500

| Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|----------|------------|---------|---------------------|--------|------------|
| | | in. | | ft. | |
| 20449806 | Blue | 1/4 | MXMS w/ Kink Guards | 25 | 536-374 |
| 20142362 | Blue | 3/8 | MXMS w/ Kink Guards | 50 | 536-374 |
| 20590578 | Blue | 1/2 | MXMS w/ Kink Guards | 75 | 536-374 |
| 20023093 | Gray | 1/4 | MXMS w/ Kink Guards | 25 | 536-387 |
| 20023096 | Gray | 3/8 | MXMS w/ Kink Guards | 50 | 536-387 |
| 20023099 | Gray | 1/2 | MXMS w/ Kink Guards | 75 | 536-387 |
| 20023102 | Gray | 1/4 | MXMS w/ Kink Guards | 100 | 536-388 |
| 20023106 | Blue | 5/16 | MXMS w/ Kink Guards | 25 | 536-388 |
| 20023109 | Blue | 3/8 | MXMS w/ Kink Guards | 50 | 536-388 |
| 20023116 | Blue | 1/2 | MXMS w/ Kink Guards | 75 | 536-388 |
| 20029580 | Yellow | 3/8 | MXMS w/ Kink Guards | 100 | 536-490 |

Neptune 3000

3000 psi WP



Application

For use on pressure washer machines with working pressures up to 3000 psi. Rated to temperatures of -20°F to 250°F (-29°C to 121°C).

Construction

› **Tube**

Nitrile synthetic rubber

› **Cover**

Black, Blue, Yellow or Gray oil-resistant synthetic rubber, RMA Class B (Medium Oil Resistance)

› **Reinforcement**

One braided steel wire

Temperature Range

-20°F to 250°F (-29°C to 121°C)

Neptune 3000

| Part # | Hose Color | Hose ID in. | Packaging | Length ft. | Material # |
|----------|------------|----------------|---------------------|---------------|------------|
| 20023506 | Black | 1/4 | MXMS w/ Kink Guards | 25 | 539-085 |
| 20023518 | Black | 3/8 | MXMS w/ Kink Guards | 50 | 539-085 |
| 20023613 | Black | 1/2 | MXMS w/ Kink Guards | 100 | 539-085 |
| 20023623 | Blue | 1/4 | MXMS w/ Kink Guards | 25 | 539-089 |
| 20023638 | Blue | 3/8 | MXMS w/ Kink Guards | 50 | 539-089 |
| 20023670 | Blue | 1/2 | MXMS w/ Kink Guards | 100 | 539-089 |
| 20023720 | Gray | 1/4 | MXMS w/ Kink Guards | 25 | 539-090 |
| 20023726 | Gray | 3/8 | MXMS w/ Kink Guards | 50 | 539-090 |
| 20216243 | Gray | 1/2 | MXMS w/ Kink Guards | 100 | 539-090 |
| 20155405 | Yellow | 1/4 | MXMS w/ Kink Guards | 25 | 539-104 |
| 20023949 | Yellow | 3/8 | MXMS w/ Kink Guards | 50 | 539-104 |
| 20023959 | Yellow | 1/2 | MXMS w/ Kink Guards | 100 | 539-104 |

Neptune 4500

4500 psi WP



Application

For use on pressure washer machines with working pressures up to 4500 psi.

Construction

› Tube

Nitrile synthetic rubber

› Cover

Smooth finish black or blue oil-resistant synthetic rubber, ARPM Class B (Medium Oil Resistance)

› Reinforcement

One braided steel wire

Temperature Range

-20°F to 250°F (-29°C to 121°C)

Neptune 4500

| Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|----------|------------|---------|---------------------|--------|------------|
| | | in. | | ft. | |
| 20069357 | Blue | 1/4 | MXMS w/ Kink Guards | 100 | 539-124 |
| 20024005 | Blue | 3/8 | MXMS w/ Kink Guards | 100 | 539-124 |
| 20023741 | Black | 3/8 | MXMS w/ Kink Guards | 100 | 539-091 |
| 20023757 | Black | 1/2 | MXMS w/ Kink Guards | 100 | 539-091 |

Neptune 6000

6000 psi WP



Application

For use on pressure washer machines with working pressures up to 6000 psi.

Construction

› Tube

Nitrile synthetic rubber

› Cover

Wrapped finish black oil-resistant synthetic rubber, ARPM Class B (Medium Oil Resistance)

› Reinforcement

Two braided steel wires

Temperature Range

-20°F to 250°F (-29°C to 121°C)

Neptune 6000

| Part # | Hose Color | Hose ID | Packaging | Length | Material # |
|----------|------------|---------|---------------------|--------|------------|
| | | in. | | ft. | |
| 20551519 | Gray | 3/8 | MXMS w/ Kink Guards | 100 | 539-148 |
| 20046112 | Black | 3/8 | MXMS w/ Kink Guards | 100 | 539-149 |

Industrial Fluid Solutions

Market segment

Industrial Hose

Contact

Continental

703 S. Cleveland Massillon Road

Fairlawn, OH 44333-3023 U.S.A.

1-800-235-4632

www.continental-industry.com

Your local contact

www.contitech.de/contactlocator

Canada

1-888-275-4397

Mexico

1-800-439-7373