

**Printec 194**  
Coating

# Printec 194




**Main Application**  
Coating

**Printec 194 is available in 2ply + polyester, 1,98 mm thickness**

**Advantages of the product**

- › Compatible with UV and aqueous coatings
- › Polyester base ensures dimensional stability, ideal for repeated jobs
- › Easy to cut by hand or with CAD tables

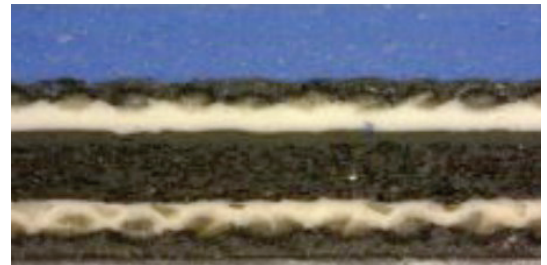

**Guiding Value**

		Standard
<b>Color:</b>	Blue	
<b>Structure:</b>	2 ply + polyester	
<b>Surface Roughness Ra*:</b>	0,6 micron	TCSBR-QMS-FOP0105:03 / TCSBR-QMS-FOP0005:07 (internal)
<b>Compressibility @ 0,20 mm*:</b>	N/A	TCSBR-QMS-FOP0104:03 (internal)
<b>Thickness +/-0,02 mm*:</b>	1,98 mm	ISO 12636
<b>Cutting depth*:</b>	0,8 mm	ISO 12636

\* Average value obtained in accordance with the given standard. Please note that the number of samples tested may differ.

 **Continental Indústria e Comercio Brasil Ltda.**  
Via de acesso João de Goes, No. 1.515,  
Barueri, Brazil  
[www.continental-industry.com/printing-technology](http://www.continental-industry.com/printing-technology)

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2024 ContiTech Deutschland GmbH, Hannover. All rights reserved. For complete information go to: [www.continental-industry.com/disclosure](http://www.continental-industry.com/disclosure)