

Rollin Suntech




Main Application UV

Rollin Suntech is available in
3 ply, 1,96 mm thickness.

Advantages of the product

- › Specifically designed for the latest UV applications (LE/HUV, LED UV)
- › Excellent printing quality (solids and half tone reproduction)
- › Very good ink release
- › Avoid ink back-trapping
- › Implements all benefits of the Dynatech System:
 - Excellent smash and edge marks resistance
 - Better vibration absorption

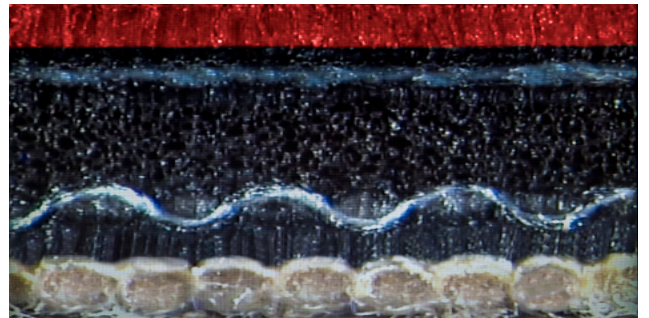

Technical Data

Ink compatibility:	UV
Thickness:	1,96 mm
Surface colour:	Red
Surface roughness:	0,8 µm
Elongation:	<0,9%
Tensile strength:	>67 N/mm
Average load value:	250 N/cm²
Applications:	HUV, LED UV

