




CONTI® FUEL CKR 2189

Fuel hose

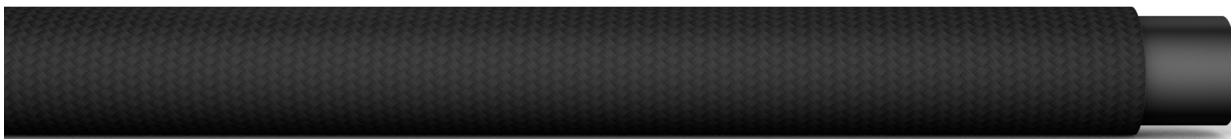

LABEL: Continental 9x3 >NBR/CMD< W/J/TC

FLOW MEDIUM

Biodiesel resistant, Diesel fuel

DESCRIPTION

Inner lining: NBR, black

Reinforcements: CMD

Working pressure up to: 5 bar / 73 psi

Temperature range: from -35 °C / -31 °F up to +90 °C / +194 °F
up to +110 °C / +230 °F short-time

Further properties: Suitable for biodiesel and methyl ester of rapeseed (RME) upto 70°C

TECHNICAL DATA

nominal width zoll/inch	inner-Ø mm	wall thickness mm	outer-Ø mm	working pressure		min. burst pressure		min. bending radius aprx. mm
				bar	psi	bar	psi	
1/8	3.2	1.9	7	5	73	15	218	26
3/16	4.5	2.5	9.5	5	73	15	218	34
1/4	5.5	2.5	10.5	5	73	15	218	42
5/16	7.5	2.5	12.5	5	73	15	218	58
3/8	9	3	15	5	73	15	218	72
7/16	11	3	17	5	73	15	218	88
5/8	15	4	23	5	73			104

Pressure and vacuum based on room temperature / High pressure and/or temperature lead to reduced component durability / Other dimensions upon request

Industrial Fluid Solutions

ContiTech Schlauch GmbH
Continentalstr. 3-5 | 34497 Korbach, Germany
industrialhoses@fluid.contitech.de

Version: 2021_05.25 | 2021-05-31

www.continental-industry.com

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2021 ContiTech AG. All rights reserved. For complete information go to: www.continental-industry.com/en/special-pages/disclaimer-publications