




# CONTI® RADIATOR FLEX - 2 M

For heating and cooling systems

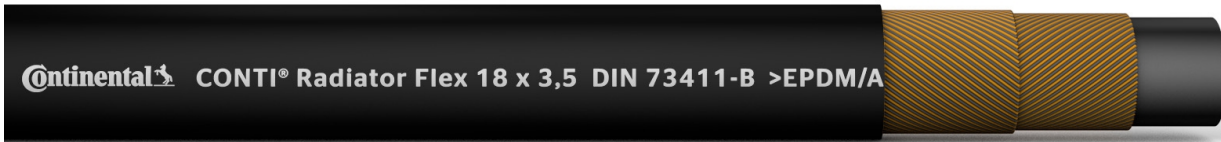

**MARKING:** Continental CONTI® Radiator FLEX 18 x 3,5 DIN73411-B >EPDM/AR/EPDM< Made in Germany

### APPLICATIONS

Agriculture, Cooling and heating systems, Cooling systems in combustion engines, Garages, General industry, Machinery and plant engineering, Workshops

### FLOW MEDIUM

Antifreeze and corrosion inhibitors, Cooling water, Water

### DESCRIPTION

**Inner lining:** per-EPDM, black, non-porous, smooth  
**Reinforcements:** Aramid  
**Cover:** per-EPDM, black, smooth  
**Working pressure up to:** 3 bar / 44 psi  
**Temperature range:** from -40 °C / -40 °F up to +135 °C / +275 °F

### STANDARD / APPROVAL

DIN  
73411-B

### TECHNICAL DATA

nominal width	inner-Ø	wall thickness	outer-Ø	length	working pressure		min. burst pressure		min. bending radius	weight
					bar	psi	bar	psi		
zoll/inch	mm	mm	mm	m					aprx. mm	aprx. g/ m
5/16	8	3.5	15	2	3	44	12	174	70	152
3/8	10	3.5	17	2	3	44	12	174	85	175
1/2	12	3.5	19	2	3	44	12	174	95	201
5/8	16	3.5	23	2	3	44	12	174	115	254
3/4	18	3.5	25	2	3	44	12	174	125	280

Temperature resistance applies only to materials used / All technical data apply at room temperature / Other dimensions upon request