




## CONTI® ULTIMATE GASKET

For hydraulic and pneumatic transport of abrasive media

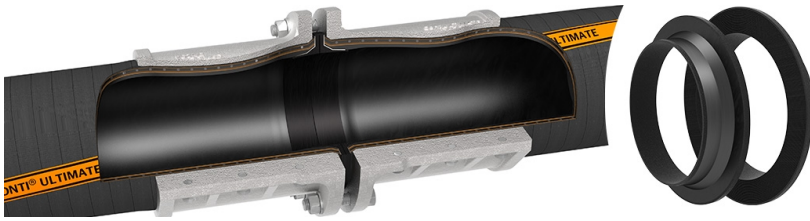

### APPLICATIONS

Chemical industry, Foundries, Gravel plants, Gravel works, Hydraulic and pneumatic applications, Mining industry, Powerplants, Sewage Treatment Plants

### DESCRIPTION

**Further properties:** Compatible with CONTI® ULTIMATE, CONTI® ULTIMATE CONDUCTIVE and CONTI® ULTIMATE Flange

Conical shape ensures ease of installation

Reliable sealing of the hose end face, the strength member is protected from the abrasive pumped medium

Rubber sealing with steel reinforcement

Sealing thickness: 8 mm

Secure connection between hose and flange

### TECHNICAL DATA

nominal width	inner-Ø
zoll/inch	mm
2	51
2 1/2	63
3	76
3 1/2	90
4	102
5	127
6	152
8	204
10	254
12	305
14	355
16	405
18	455
20	508
24	610